

A competition wrestling ring for professional wrestlers. The competition wrestling ring is designed for wrestling matches under the rules of WWE. Extra strong ropes core made from polyamid.


- ▶ The dimension between the ropes is 6 x 6 m (19.8 x 19.8 ft)
- ▶ Elevated padded floor one meter (3.2 feet)
- ▶ Padded floors 2.50 cm (0.98 inches)

#### International parameters:

All parameters of the wrestling ring are designed to be as close as possible to the parameters of the World Wrestling Federation. The floor of the ring is well cushioned and covered with printed PVC canvas, and it meets the most stringent safety requirements. The surface of the frame is galvanically treated so as to provide exceptional durability and longevity. Other ring parameters are always optional and always depend on the specific order and choice of a promoter for an event.

#### Safety:

A special feature of this ring is a suspension design that enables the floor to sag about 7 cm. (gallery) The OSB boards that form the floor of the ring are 2.5 cm (0.98 inches) thick. The elevated OSB floor has a padded layer of 2.5 cm (0.98 inches) and a PVC canvas.

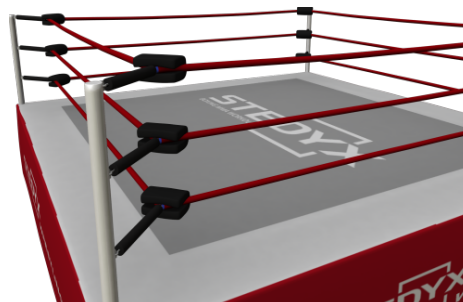

#### ZÁKLADNÍ SPECIFIKACE

**Use:** wrestling gala shows

**Číslo produktu:** WRR 6050

**Venkovní rozměr:** 6x6m

**Vnitřní rozměr mezi lany:** 5x5m

**Rám:** double suspension, zinc coated

**Výška podlahy:** 1 m (3,2ft.)

**Materiál podlahy:** OSB boards

**Quantity floor boards:** 18

**Polstrování podlahy:** 2,5 cm(0,98 in.)

**Váha:** 1450kg (3.197 lb.)

#### SHIPPING DIMENSIONS

**Free loaded on the truck:** 3,3 x 2,2 x 1,6m (10,8 x 7,2 x 5,2 ft.)

**Packed in OSB boxes 2 pcs::** 2,3 x 1 x 1,6m (7,5 x 3,2 x 5,2 ft.)

**Packed in boxes #2::** 2,5 x 1,3 x 1m (8,2 x 4,2 x 3,2 ft.)

#### WARRANTY:

**Construction::** 5 years

**Others::** 2 years except tear and wear